


### Description

ORALITE® retroreflective 5938MFlex Prismatic Construction Grade is a soft highly flexible and reflective, weatherproof film bonded to a heavy duty fibre-reinforced material. The product has excellent corrosion and solvent resistance providing outstanding durability and long sign life. The products monolayer construction means the product will not delaminate. The product performs especially well at low temperatures and keeps its flexibility.

### Application Areas

The surface of reflective sheeting can be screen printed to manufacture foldable construction and work zone signs as well as utility and incident management signs where a high level of reflectivity is required. ORALITE® 5938MFlex is available in roll format and is intended for medium-term outdoor use. The material can be cut to size without necessity for edge sealing. The textile backing is permanently bonded, therefore ORALITE 5938MFlex is not suitable for bonding to surfaces.

The products retroreflective system consists of metallised microprisms. The distinct pattern identifies the machine direction and the manufacturer of the sheeting and is shown opposite.

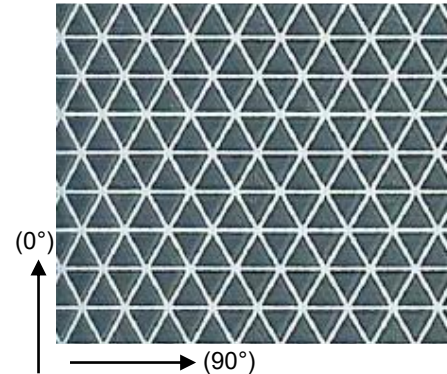

### Product Features

- Metalized Micro-prismatic construction
- Very High Reflectivity
- Flexible (even at low temperature)
- Easy to cut
- Does not delaminate
- Resistant to low temperatures
- Impact Resistant
- Screen Printable
- Easy to clean

### Retroreflectivity

ORALITE® 5938MFlex exceeds the minimum performance requirements of EN 12899-1 (RA2). The required minimum retroreflection values, shown in table 1, are complied with when measured in accordance with the corresponding specifications using CIE standard illuminant A, and the provisions of CIE No.54.2. Typical performance of ORALITE® 5938MFlex is shown in table 2 together with typical specification limits as reference.

### Colour

ORALITE® 5938MFlex sheeting is available in white (010). The sheeting conforms to the daytime colour requirements in table 3 when measured in accordance with the corresponding specifications, the provisions of CIE No. 15.2, and shall comply with the specifications of EN 12899-1 (RA2).

### Printing

We recommend ORALITE® screen printing ink series 5018. Refer to the technical data sheet of the screen ink for further information.

### Product Data

Table 1: Minimum Reflective Values for new sheeting (cd/lx/m<sup>2</sup>) according to EN 12899-1 (RA2).

Specific coefficient of retroreflection (EN 12899-1 RA2)									
Observation angle	0,2°			0,33°			2°		
Entrance angle	5°	30°	40°	5°	30°	40°	5°	30°	40°
White	250	150	110	180	100	95	5	2,5	1,5

Table 2: Typical Retroreflectivity for new sheeting (cd/lx/m<sup>2</sup>) as per DIN 67520

Specific coefficient of retroreflection R' in cd / lx pro m <sup>2</sup>				
Observation angle	ORALITE® 5938MFlex typical		DIN 67520 - Class RA3A	
	0.33°		0.33°	
Entrance angle	5	30	5°	30°
White 010	460	260	425	225

Table 3: Colour

Colour specification limits at daylight (new sheeting, measured in accordance with CIE No. 15.2):

Chromaticity coordinates (EN12899-1)									
Colours	1		2		3		4		Luminance factor β
	x	y	x	y	x	y	x	y	
White	0.305	0.315	0.335	0.345	0.325	0.355	0.295	0.325	≥ 0.27

### Physical and Chemical Properties

Thickness <sup>1</sup>	0.480 mm
Standard Roll Size	1235mm x 50m
Shelf life <sup>2</sup>	1 year
Service life by specialist application <sup>3</sup> under vertical outdoor exposure	5 years
Temperature resistance***	- 20°C - + 60°C
Resistance to solvents and chemicals	Resistant to most oils, grease, fuels, aliphatic solvents, weak acids, salts and alkalis

<sup>1</sup> average

<sup>2</sup> in original packaging, at 20°C and 50% relative humidity

<sup>3</sup> standard central European climate

### IMPORTANT NOTICE

When using ORALITE® sheeting the relevant national specifications have to be complied with. ORAFOL recommends you obtain the current requirements from your local authority and ensure product conformance with such requirements. Please contact ORAFOL for further information.

All ORALITE® products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning ORALITE® products is based upon research which the Company believes to be reliable although such information does not constitute a warranty. Because of the variety of uses of ORALITE® products and the continuing development of new applications, the purchaser should carefully consider the suitability and performance of the product for each intended use, and the purchaser shall assume all risks regarding such use. All specifications are subject to change without prior notice.

No warranty is given for purposes other than those listed in the Technical Datasheet or which are not processed according to ORAFOL's processing and handling instructions. The durability of the signs will depend on a variety of factors, including but not limited to substrate selection and preparation, compliance with recommended application guidelines, geographic area, exposure conditions and maintenance of the product and finished sign. Sign failures caused by the substrate or improper surface preparations are not the responsibility of ORAFOL. Please refer to the full warranty document available at [www.orafol.com](http://www.orafol.com) for detailed information.

ORALITE® is a trademark of ORAFOL Europe GmbH.