## AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

## **TEST REPORT**

Client: Orafol Australia


8 Blanck Street Ormeau QLD 4208 **Test Number** : 23-005063

Issue Date : 19/12/2023 Print Date : 19/12/2023

Sample Description Clients Ref : "Oraguard 213M Matt PVC Laminate"

Self adhesive film Colour : Clear

End Use: Floor Graphics

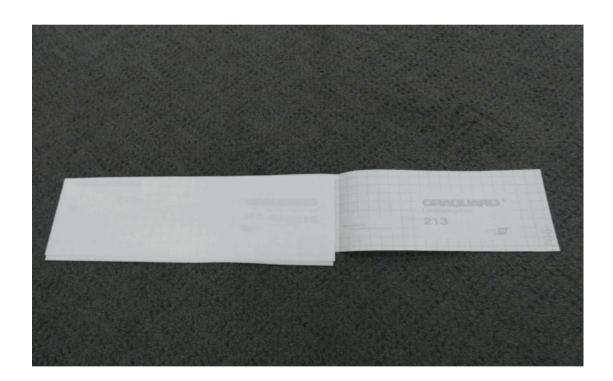

312264 68289 Page 1 of 2

Australian Wool Testing Authority Ltd Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



MICHAEL A. JACKSON B.Sc.(Hons)

Fiona McDonald

APPROVED SIGNATORY

## AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

## **TEST REPORT**

Client: Orafol Australia

8 Blanck Street Ormeau QLD 4208 Test Number : 2

23-005063 19/12/2023

Print Date

19/12/2023

AS 4586-2013 Appendix A Slip Resistance Classification of new Pedestrian Surface Materials

Wet Pendulum Test Method

Date of Testing

18-12-2023

Operator

AWTA Test Operator 4

Test Temperature (20±5degC)

22 °C

Samples mounted in aluminum plate prior testing

Test Direction

Length

Fixed/Unfixed

Unfixed

Slider No 96 Batch No

23

Length British Pendulum 2

3

5 44 SRV 44

number

Classification

P3

Equipment: Cooper Pendulum Skid Tester Serial No: 1433-01 Calibrated 11/10/2023 Slider prepared using P400 and 3µm lapping film.

These results apply only to the specimens tested and it is recommended that before selection of flooring or paving materials the effect of service conditions, including maintenance and wear on their slip resistance be checked.

Non Directional product

Tested in long direction of submitted sample

312264

Australian Wool Testing Authority Ltd Copyright - All Rights Reserved 68289

Page 2 of 2



Accredited for compliance with ISO/IEC 17025 - Testing Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

Fiona McDonald

APPROVED SIGNATORY



MICHAEL A. JACKSON B.Sc.(Hons)

0204/11/06