


# AR 4550

Broadband Antireflection single-layer coating for structured surfaces  
Colour-neutral residual reflex

## Principle curve: AR4550 on PMMA-plano surface, one sided (part thickness 2 mm)

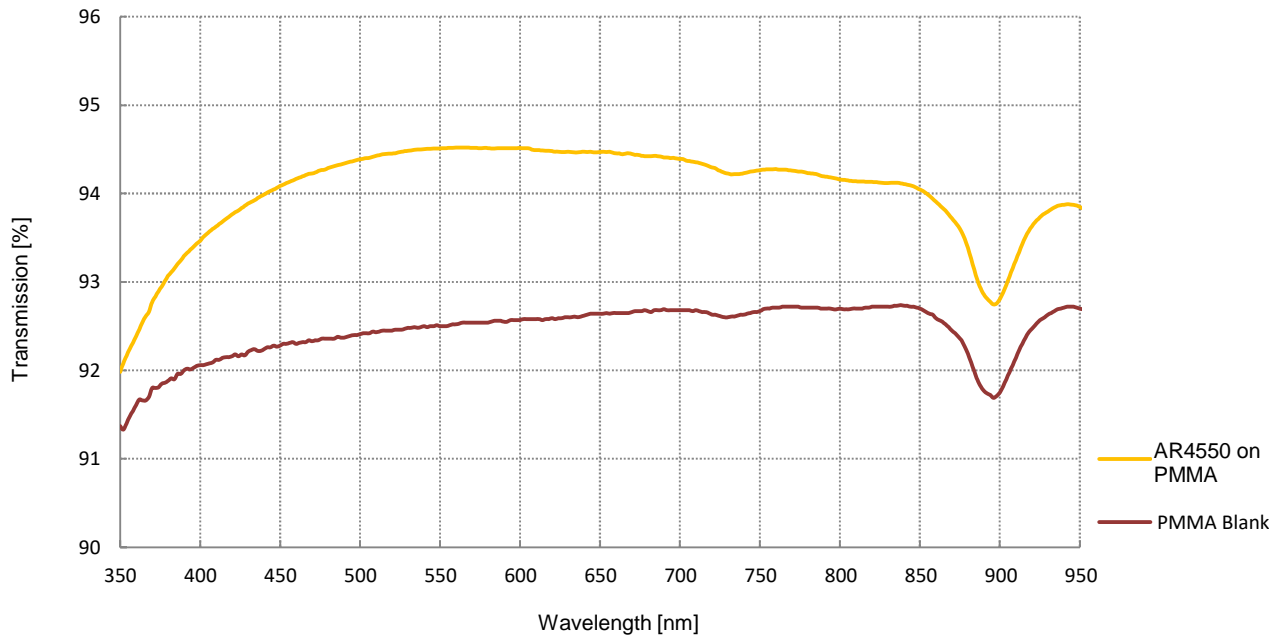

### Properties:

- reduced losses (reflection, stray light and absorption)
- abrasion resistant according to DIN EN ISO 2409 (cross hatch Tape-Test)
- climate resistant according to DIN EN ISO 9022-14-06 (5 cycles at 70°C to -40°C)
- climate resistant according to DIN EN ISO 9022-16-01 (5 cycles at 23°C / 40°C – 85% / 92% relative humidity)
- colour-neutral residual reflex

Engineered to Manage Light™

### **ORAFOL Fresnel Optics GmbH**

Flurstedter Marktweg 13 • 99510 Apolda • Germany

Tel.: +49 3644 5011 0 • Fax: +49 3644 501150

E-Mail: sales@fresnel-optics.de • www.fresnel-optics.de

