

## Description

ORALITE® 5931 Prismatic Construction Grade are flexible, highly reflective, weatherproof, self-adhesive films with excellent corrosion and solvent resistance. The reflective sheeting includes prints intended for the manufacture of traffic control and guidance signs, warning, construction/work zone and information signs, and includes the necessary imprint. ORALITE® 5931 is available as application kit or roll and is intended for medium-term outdoor use.

Its retroreflective system consists of sealed cells of air backed microprisms, using total internal reflection. The distinct shape of the sealing pattern identifies the machine direction and the manufacturer of the sheeting shown in Figure 1.


## Retroreflectivity

ORALITE® 5931 exceeds the minimum performance requirements of DIN 67520:2008-11 (RA2; design C) and ASTM D4956-11a (Type IV sheeting). The required minimum retroreflection values, shown in tables 1 and 2, are complied with when measured in accordance with the corresponding specifications using CIE standard illuminant A, and the provisions of CIE No.54.2.

## Color

ORALITE® 5931 sheeting is available as rolls in white (010), yellow (020), fluorescent yellow-green (029) fluorescent yellow (037) and fluorescent orange (038) with orange (035), red (030) or black print (070, opaque). The sheeting conforms to the daytime colour requirements in tables 3 and 4 when measured in accordance with the corresponding specifications, the provisions of CIE No. 15.2, and shall comply with the specifications of DIN 6171: 2011-11 and ASTM D4956-11a.

## Figure 1 - Sealing pattern and application directions

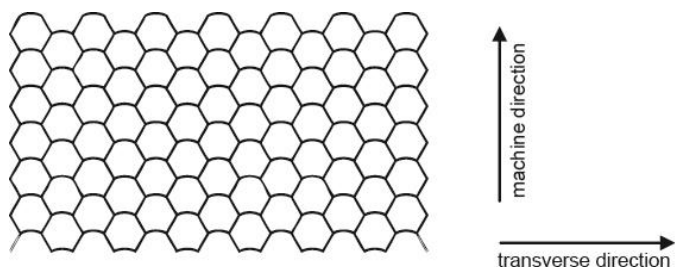

## Adhesive

The adhesive consists of a solvent polyacrylate, permanent pressure sensitive adhesive specially formulated for the application to metallic surfaces such as aluminium and zinc coated steel plate as well as polyolefinic substrates. The adhesive is protected by a release liner made of polypropylene film, silicone coated on one side, 0.075 mm [0.003"] thickness.

## Application/Processing

ORALITE® 5931 was especially developed for traffic control applications. Surfaces to which the material will be applied must be thoroughly cleaned from dust, grease or any contamination which could affect the adhesion of the material. Freshly lacquered or painted surfaces should be completely cured. The compatibility of selected lacquers and paints should be tested by the user, prior to application of the material. For other applications the user is fully responsible for evaluating the suitability of the product, and for any risks associated with that use.

ORALITE® 5931 Prismatic Construction Grade can be screen or digitally printed or laminated with overlay films. The screen printing ink recommended is ORALITE® 5018. A transparent coating is not necessary when using this combination of ink and sheeting.

Please refer to the Practical Information #4.3 published by ORAFOL for full instructions or contact your ORAFOL Reflective Solutions Division representative for advice relating to the above.

**Note:** All ORALITE® products are manufactured within an ISO 9001:2008 controlled manufacturing environment and batch traceability is possible on the basis of the roll number.



ORAFOL Americas – GA  
1100 Oracal Parkway  
Black Creek, GA 31308  
Phone: 888.672.2251

ORAFOL Americas – CT  
120 Darling Drive  
Avon, CT 06001  
Phone: 800.654.7570  
techsupport-americas@orafol.com - www.orafolamericas.com

ORAFOL Canada  
2831 Bristol Circle  
Oakville, Ontario L6H 6X5  
Phone: 888.727.3374

### Product Data

Retroreflectivity for new sheeting (cd/lx/m<sup>2</sup>) as per DIN 67520:2008-11 and ASTM D4956-11a

**Table 1- Specific coefficient of retroreflection (DIN 67520:2008-11 RA2; design C)**

Observation Angle	0.2°			0.33°			2°		
Entrance Angle	5°	30°	40°	5°	30°	40°	5°	30°	40°
White	250	150	110	180	100	95	5	2.5	1.5
Yellow	170	100	70	122	70	64	3	1.5	1
Orange <sup>1</sup>	100	60	29	65	40	20	1.5	1	>0
Red <sup>1</sup>	45	25	15	25	14	13	1	0.4	0.3

<sup>1</sup> Printed colors

**Table 2 – Specific coefficient of retroreflection (ASTM D4956-11a Type IV Sheeting)**

Observation Angle	0.1°		0.2°		0.5°	
Entrance Angle	-4°	30°	-4°	30°	-4°	30°
White	500	240	360	170	150	72
Yellow	380	175	270	135	110	54
Orange <sup>1</sup>	200	94	145	68	60	28
Red <sup>1</sup>	90	42	65	30	27	13
fl. Yellow-green	400	185	290	135	120	55
fl. Yellow	300	140	220	100	90	40
fl. Orange	150	70	105	50	45	22

<sup>1</sup> Printed colors



ORAFOL Americas – GA  
1100 Oracal Parkway  
Black Creek, GA 31308  
Phone: 888.672.2251

ORAFOL Americas – CT  
120 Darling Drive  
Avon, CT 06001  
Phone: 800.654.7570  
techsupport-americas@orafol.com - www.orafolamericas.com

ORAFOL Canada  
2831 Bristol Circle  
Oakville, Ontario L6H 6X5  
Phone: 888.727.3374

Daytime color specification limits for new sheeting

**Table 3- Chromaticity coordinates (DIN 6171-1: 2011-11)**

Colors	1		2		3		4		Luminance Factor $\beta$
	x	y	x	y	x	y	x	y	
White 010	0.305	0.315	0.335	0.345	0.325	0.355	0.295	0.325	$\geq 0.27$
Yellow 020	0.494	0.506	0.470	0.480	0.513	0.437	0.545	0.455	$\geq 0.16$
fl. Yellow-Green	0.373	0.625	0.358	0.549	0.427	0.483	0.465	0.535	$\geq 0.60$
fl. Yellow	0.545	0.455	0.487	0.423	0.427	0.483	0.465	0.535	$\geq 0.45$
fl. Orange	0.570	0.430	0.506	0.404	0.569	0.341	0.655	0.345	$\geq 0.30$
Orange <sup>1</sup>	0.631	0.369	0.552	0.359	0.506	0.404	0.570	0.430	$\geq 0.12$
Red 030	0.735	0.265	0.700	0.250	0.607	0.343	0.655	0.345	$\geq 0.03$

<sup>1</sup> Printed colors

**Table 4- Chromaticity coordinates (ASTM D4956)**

Colors	1		2		3		4		Luminance Factor $\beta$
	x	y	x	y	x	y	x	y	
White	0.303	0.300	0.368	0.366	0.340	0.393	0.274	0.329	$\geq 27$
Yellow	0.498	0.412	0.557	0.442	0.479	0.520	0.438	0.472	$15 \leq Y \leq 45$
Orange <sup>1</sup>	0.558	0.352	0.636	0.364	0.570	0.429	0.506	0.404	$10 \leq Y \leq 30$
Red	0.648	0.351	0.735	0.265	0.629	0.281	0.565	0.346	$2.5 \leq Y \leq 15$
fl. Yellow-Green	0.387	0.610	0.369	0.546	0.428	0.496	0.460	0.540	$\geq 60$
fl. Yellow	0.479	0.520	0.446	0.483	0.512	0.421	0.557	0.422	$\geq 40$
fl. Orange	0.583	0.416	0.535	0.400	0.595	0.351	0.645	0.355	$\geq 20$

<sup>1</sup> Printed colors

### Physical and Chemical Properties

<b>Thickness*</b> (without protective paper and adhesive)	19-mil
<b>Temperature resistance**</b>	Adhered to aluminum, -40°F to +180°F
<b>Resistance to cleaning agents</b>	Adhered to aluminum, 8h in solution (0.5% household cleaning agents) at room temperature and 149°F, no variation
<b>Adhesive power*</b> (FINAT-TM 1 after 24h, stainless steel)	3.42 lb/in (film tear)
<b>Shelf life**</b>	1 year
<b>Application temperature</b>	>50°F
<b>Service life by specialist application</b>	5 years (not printed)
Under vertical outdoor exposure (standard central European climate)	

\* average \*\* in original packaging, at 68° F and 50% relative humidity



ORAFOL Americas – GA  
1100 Oracal Parkway  
Black Creek, GA 31308  
Phone: 888.672.2251

ORAFOL Americas – CT  
120 Darling Drive  
Avon, CT 06001  
Phone: 800.654.7570  
techsupport-americas@orafol.com - www.orafolamericas.com

ORAFOL Canada  
2831 Bristol Circle  
Oakville, Ontario L6H 6X5  
Phone: 888.727.3374

**Note:**

All ORALITE® products are manufactured within an ISO 9001:2008 controlled manufacturing environment and batch traceability is possible on the basis of the roll number.

**IMPORTANT NOTICE**

When using ORALITE® sheeting, please comply with relevant national specifications. ORAFOL recommends obtaining the current requirements from your local authority and ensure product conformance with such requirements. Please contact ORAFOL for further information.

All ORALITE® products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning ORALITE® products is based upon research which the Company believes to be reliable, although, such information does not constitute a warranty. Because of the variety of uses of ORALITE® products and the continuing development of new applications, the purchaser should carefully consider the suitability and performance of the product for each intended use, and the purchaser shall assume all risks regarding such use. All specifications are subject to change without prior notice.

Surfaces to which the material will be applied must be thoroughly cleaned from dust, grease or any contamination which could affect the adhesion of the material. Freshly lacquered or painted surfaces should be allowed to dry for at least three weeks and to completely cure respectively. The compatibility of selected lacquers and paints should be tested by the user, prior to application of the material. The self-adhesive reflective material can only be used for dry application. The low tensile strength of the material can make the removability of the reflective film more difficult. Please review applicable application information published by ORAFOL.

No warranty is given for purposes other than those listed in the Technical Datasheet or which are not processed according to ORAFOL's processing and handling instructions. The durability of the signs will depend on a variety of factors, including but not limited to substrate selection and preparation, compliance with recommended application guidelines, geographic area, exposure conditions and maintenance of the product and finished sign. Sign failures caused by the substrate or improper surface preparations are not the responsibility of ORAFOL. Please refer to the full warranty document available at [www.orafolamericas.com](http://www.orafolamericas.com) for detailed information.

**WARNING:** This product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

ORALITE® is a trademark of ORAFOL Europe GmbH.



ORAFOL Americas – GA  
1100 Oracal Parkway  
Black Creek, GA 31308  
Phone: 888.672.2251

ORAFOL Americas – CT  
120 Darling Drive  
Avon, CT 06001  
Phone: 800.654.7570  
techsupport-americas@orafol.com - [www.orafolamericas.com](http://www.orafolamericas.com)

ORAFOL Canada  
2831 Bristol Circle  
Oakville, Ontario L6H 6X5  
Phone: 888.727.3374