



Silver



Yellow




Red



Blue



Green

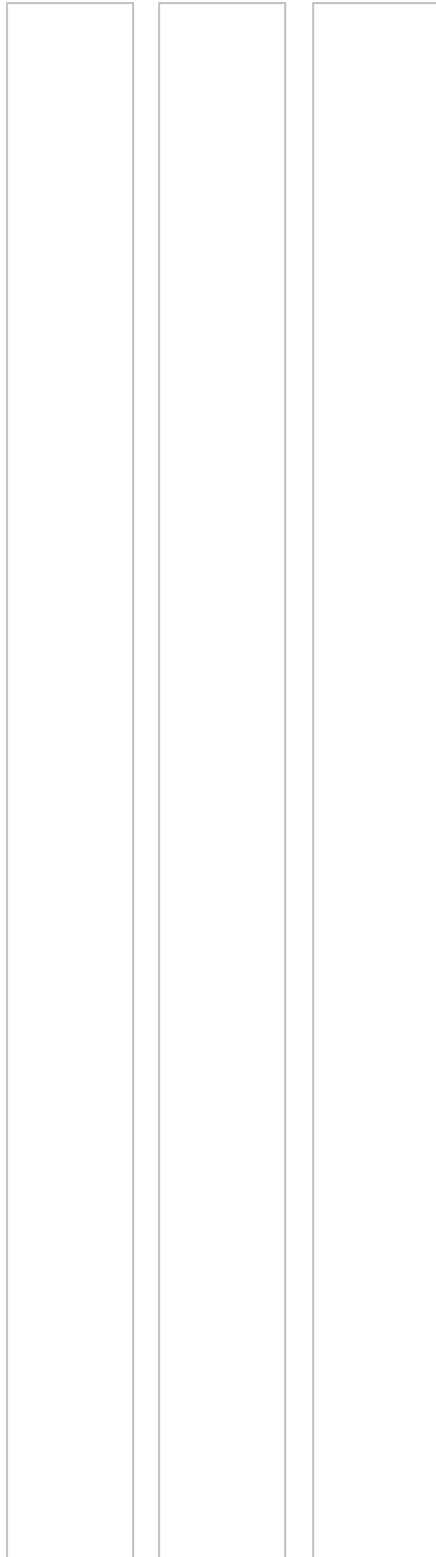

Highest Brightness

Meets the retro-reflective requirements of ASNZ1906.2 Class 1A. Typical reflectivity in silver is 1000 CIL at 0.2° obs 4.0° entrance angle.

Durability

Designed for long term outdoor applications and has 30 years proven history of use in the global trucking industry. Comes with a limited 7 year warranty.

Resistant to the Toughest Conditions

D82's unique thin monolayer construction means that it withstands power washing and has good resistance to the impacts and abrasion common in the fleet industry.

Easy to Apply

D82 is flexible and very easy to apply and features a high tack pressure sensitive adhesive. It can be cut around obstacles such as rivets. It requires no edge sealing and can be computer cut.

Available as You Need It

Reflexite Australia stocks all of the primary colours and pre striped colours displayed opposite in both wide width rolls (770mm x 45.7 metres) or slit to your required width in 45.7m long rolls.

IMPORTANT NOTICE

All ORAFOL products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects.

Published information concerning ORAFOL products is based upon research, which the Company believes to be reliable although such information does not constitute a warranty.

Because of the variety of users of ORAFOL products and the continuing development of new applications, the purchaser should carefully consider the suitability and performance of the product for each intended use, and the purchaser shall assume all risks regarding such use.

All specifications are subject to change without prior notice.