



EN 469
ISO 14116
EN ISO 20471

Segmented

ORALITE® GP 097


Segmented heat applied reflective safety tape for industrial workwear
with flame retardant

Product benefits include:

- Approved to EN ISO 20471:2013 Separate Performance, EN 469:2005 and ISO 14116:2015
- Ideal for industrial washable high visibility garments with flame retardant properties
- Glass bead construction
- Heat application
- Applies as a single strip
- Visually appealing tape design
- Washing:
 - *50 cycles at 60° C
 - **50 cycles at 75° C + tumble dry at 90° C or
50 cycles at 75° C + tunnel dry at 155° C
- Roll size: 55 mm x 50 m (actual tape width 50 mm)
- 10 rolls per box. Sold in full boxes only.
- 36 boxes per pallet

*) as per ISO 6330:2012, Method 6N

**) as per ISO 15797:2002, Method 8

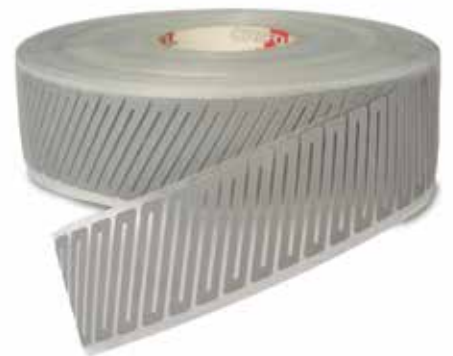

ORALITE®

Engineered to Save Lives™

To find out more information visit www.orafol.com
or email reflective.solutions@orafol.de if you have any questions.

ORAFOL®