

Product Description

ORALITE® 5931 Prismatic Construction Grade are flexible, highly reflective, weatherproof, self-adhesive films with excellent corrosion and solvent resistance. The reflective sheeting includes prints intended for the manufacture of traffic control and guidance signs, warning, construction/work zone and information signs, and includes the necessary imprint. ORALITE® 5931 is available as application kit or roll and is intended for medium-term outdoor use.

Its retroreflective system consists of sealed cells of air backed microprisms, using total internal reflection. The distinct shape of the sealing pattern identifies the machine direction and the manufacturer of the sheeting shown in Figure 1.


Retroreflectivity

ORALITE® 5931 exceeds the minimum performance requirements of DIN 67520:2008-11 (RA2; design C) and ASTM D4956 (type IV). The required minimum retroreflection values, shown in tables 1 and 2, are complied with when measured in accordance with the corresponding specifications using CIE standard illuminant A, and the provisions of CIE No.54.2.

Colour

ORALITE® 5931 sheeting is available as rolls in white (010), yellow (020), fluorescent yellow-green (029) fluorescent yellow (037) and fluorescent orange (038) with orange (035), red (030) or black print (070, opaque). The sheeting conforms to the daytime colour requirements in tables 3 and 4 when measured in accordance with the corresponding specifications, the provisions of CIE No. 15.2, and shall comply with the specifications of DIN 6171: 2011-11 and ASTM D4956 (type IV).

Figure 1 - Sealing pattern and application directions

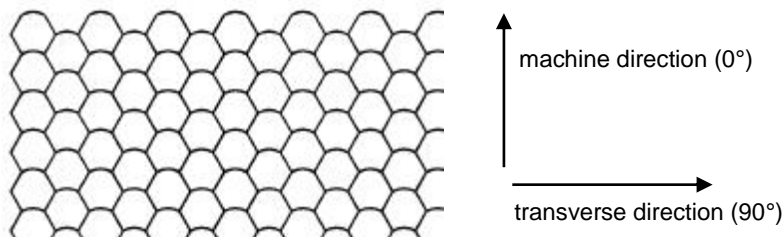

Adhesive

The adhesive consists of a solvent polyacrylate, permanent pressure sensitive adhesive specially formulated for the application to metallic surfaces such as aluminium and zinc coated steel plate as well as polyolefinic substrates. The adhesive is protected by a release liner made of polypropylene film, silicone coated on one side, 0.075 mm [0.003"] thickness.

Application/Processing

ORALITE® 5931 was especially developed for traffic control applications. Surfaces to which the material will be applied must be thoroughly cleaned from dust, grease or any contamination which could affect the adhesion of the material. Freshly lacquered or painted surfaces should be completely cured. The compatibility of selected lacquers and paints should be tested by the user, prior to application of the material. For other applications the user is fully responsible for evaluating the suitability of the product, and for any risks associated with that use.

ORALITE® 5931 Prismatic Construction Grade can be screen or digitally printed or laminated with overlay films. The screen printing ink recommended is ORALITE® 5018. A transparent coating is not necessary when using this combination of ink and sheeting.

Please refer to the Practical Information #4.3 published by ORAFOL for full instructions or contact your ORAFOL Reflective Solutions Division representative for advice relating to the above.

Note: All ORALITE® products are manufactured within an ISO 9001:2015 controlled manufacturing environment and batch traceability is possible on the basis of the roll number.

Product Data

Retroreflectivity for new sheeting (cd/lx/m²) as per DIN 67520:2008-11 & ASTM D4956 (type IV)

Observation angle	0.2°			0.33°			2°		
Entrance angle	5°	30°	40°	5°	30°	40°	5°	30°	40°
White	250	150	110	180	100	95	5	2.5	1.5
Yellow	170	100	70	122	70	64	3	1.5	1
Orange ¹	100	60	29	65	40	20	1.5	1	0
Red ¹	45	25	15	25	14	13	1	0.4	0.3

¹ Printed colours

Observation angle	0.1°		0.2°		0.5°	
Entrance angle	-4°	30°	-4°	30°	-4°	30°
White	500	240	360	170	150	72
Yellow	380	175	270	135	110	54
Orange ¹	200	94	145	68	60	28
Red ¹	90	42	65	30	27	13
fl. Yellow-Green	400	185	290	135	120	55
fl. Yellow	300	140	220	100	90	40
fl. Orange	150	70	105	50	45	22

¹ Printed colours

Daytime color specification limits for new sheeting:

Colours	1		2		3		4		Luminance factor β
	x	y	x	y	x	y	x	y	
White	0.305	0.315	0.335	0.345	0.325	0.355	0.295	0.325	≥ 0.27
Yellow	0.494	0.506	0.470	0.480	0.513	0.437	0.545	0.455	≥ 0.16
fl. Yellow-Green	0.373	0.625	0.358	0.549	0.427	0.483	0.465	0.535	≥ 0.60
fl. Yellow	0.545	0.455	0.487	0.423	0.427	0.483	0.465	0.535	≥ 0.45
fl. Orange	0.570	0.430	0.506	0.404	0.569	0.341	0.655	0.345	≥ 0.30
Orange ¹	0.631	0.369	0.552	0.359	0.506	0.404	0.570	0.430	≥ 0.12
Red ¹	0.735	0.265	0.700	0.250	0.607	0.343	0.655	0.345	≥ 0.03

¹ Printed colours

Table 4 – Chromaticity coordinates (ASTM D4956 (type IV))

Colours	1		2		3		4		Luminance factor (Y %)
	x	y	x	y	x	y	x	y	
White	0.303	0.300	0.368	0.366	0.340	0.393	0.274	0.329	≥ 27
Yellow	0.498	0.412	0.557	0.442	0.479	0.520	0.438	0.472	15 ≤ Y ≤ 45
Orange ¹	0.558	0.352	0.636	0.364	0.570	0.429	0.506	0.404	10 ≤ Y ≤ 30
Red ¹	0.648	0.351	0.735	0.265	0.629	0.281	0.565	0.346	2.5 ≤ Y ≤ 15
fl. Yellow-Green	0.387	0.610	0.369	0.546	0.428	0.496	0.460	0.540	≥ 60
fl. Yellow	0.479	0.520	0.446	0.483	0.512	0.421	0.557	0.422	≥ 40
fl. Orange	0.583	0.416	0.535	0.400	0.595	0.351	0.645	0.355	≥ 20

¹ Printed colours

Physical and Chemical Properties

Thickness* (without protective paper and adhesive)	0.480 mm (19 mils) ²
Temperature resistance	adhered to aluminium, -40° C to +82° C (-40°F to 180°F)
Resistance to cleaning agents	adhered to aluminium, 8h in solution (0.5% household cleaning agents) at room temperature and 65°C (150° F), no variation
Adhesive power*¹ (FINAT-TMI after 24h, stainless steel)	15 N/25 mm (1 inch) (film tear)
Shelf life**	1 year
Application temperature	> +10° C (50° F)
Service life by specialist application***	5 years (not printed)

under vertical outdoor exposure

* average ** in original packaging, at 20°C and 50% relative humidity *** standard central European climate ¹ 180° Peel @ 300mm (12") /min ² Fl. Orange sheeting has a typical thickness of 0.51mm (20mils)

Note: Values stated in SI units are to be regarded as standard. The values in parentheses are conversions and shall not be considered as the standard, as these values maybe approximate.

IMPORTANT NOTICE

When using ORALITE® sheeting the relevant national specifications have to be complied with. ORAFOL recommends you obtain the current requirements from your local authority and ensure product conformance with such requirements. Please contact ORAFOL for further information.

All ORALITE® products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning ORALITE® products is based upon research which the Company believes to be reliable although such information does not constitute a warranty. Because of the variety of uses of ORALITE® products and the continuing development of new applications, the purchaser should carefully consider the suitability and performance of the product for each intended use, and the purchaser shall assume all risks regarding such use. All specifications are subject to change without prior notice.

No warranty is given for purposes other than those listed in the Technical Datasheet or which are not processed according to ORAFOL's processing and handling instructions. The durability of the signs will depend on a variety of factors, including but not limited to substrate selection and preparation, compliance with recommended application guidelines, geographic area, exposure conditions and maintenance of the product and finished sign. Sign failures caused by the substrate or improper surface preparations are not the responsibility of ORAFOL. Please refer to the full warranty document available at www.orafol.com for detailed information.

ORALITE® is a trademark of ORAFOL Europe GmbH.