

### Product Description

ORALITE® retroreflective films series 5960 High Intensity Prismatic Construction Grade are highly reflective, weatherproof, self-adhesive films with excellent corrosion and solvent resistance. The product was specifically developed for the manufacture of planar traffic control, guidance, warning and information signs, which are intended for temporary vertical outdoor use. ORALITE® 5960 sheeting is composed of a UV stabilised acrylic front film. Its retroreflective system consists of sealed cells of air backed micropisms, using total internal reflection. The distinct shape of the sealing pattern identifies the machine direction and the manufacturer of the sheeting shown in Figure 1.


### Retroreflectivity

ORALITE® 5960 exceeds the minimum performance requirements of DIN 67520:2013-10 (RA2; design C) and ASTM D4956 (type IV). The required minimum retroreflection values, shown in tables 1 and 2, are complied with when measured in accordance with the corresponding specifications using CIE standard illuminant A, and the provisions of CIE No.54.2.

### Colour

ORALITE® 5960 High Intensity Prismatic Construction Grade sheeting is available in white (010), yellow (020), fluorescent yellow-green (029), orange (035), fluorescent orange (038), red (030), green (060), blue (050) and brown (080). The sheeting conforms to the daytime colour requirements in tables 3 & 4 when measured in accordance with the corresponding specifications, the provisions of CIE No. 15.2, & shall comply with the specifications of DIN 6171-1: 2013-10 & ASTM D4956 (type IV).

### Figure 1 - Sealing pattern and application directions

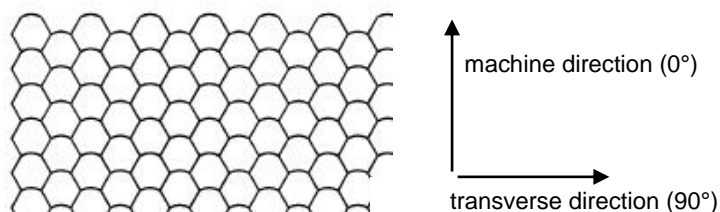

### Adhesive

The adhesive consists of a solvent polyacrylate, permanent pressure sensitive adhesive specially formulated for applications on metal as well as plastic surfaces. The adhesive is protected by a release liner made of polypropylene film, silicone coated on one side, 60 micron thickness.

### Application/Processing

ORALITE® 5960 High Intensity Prismatic Construction Grade was especially developed for traffic control applications. Surfaces to which the material will be applied must be thoroughly cleaned from dust, grease or any contamination which could affect the adhesion of the material. Freshly lacquered or painted surfaces should be completely cured. The compatibility of selected lacquers and paints should be tested by the user, prior to application of the material. For other applications the user is fully responsible for evaluating the suitability of the product, and for any risks associated with that use.

ORALITE® 5960 in white colour can be screen or digitally printed. The printed sheeting will continue to meet the retroreflective values of the respective color provided that ORAFOL's application guidelines are followed. The screen printing ink recommended is ORALITE® 5018. A transparent coating is not necessary. The material can also be printed on the ORALITE® UV Traffic Sign Printer with the specially developed UV digital inks ORALITE® 5019.

Please refer to the Practical Information #4.3 published by ORAFOL for full instructions or contact your ORAFOL Reflective Solutions Division representative for advice relating to the above.

### Warranty

No warranty is given for purposes other than those listed in the Technical datasheet or which are not processed according to ORAFOL's processing and handling instructions. The durability of the signs will depend on a variety of factors, including but not limited to substrate selection and preparation, compliance with recommended application guidelines, geographic area, exposure conditions and maintenance of the product and finished sign. Sign failures caused by the substrate or improper surface preparations are not the responsibility of ORAFOL. Please refer to the warranty document published by ORAFOL for detailed information.

### Note:

All ORALITE® products are manufactured within an ISO 9001:2015 controlled manufacturing environment and batch traceability is possible on the basis of the roll number.

### Product Data

#### Retroreflectivity for new sheeting (cd/lx/m<sup>2</sup>) as per DIN 67520:2008-11 and ASTM D4956 (type IV)

Table 1 – Specific coefficient of retroreflection (DIN 67520:2008-11 RA2; design C)									
Observation angle	0.2°			0.33°			2°		
Entrance angle	5°	30°	40°	5°	30°	40°	5°	30°	40°
White	250	150	110	180	100	95	5	2.5	1.5
Yellow	170	100	70	122	70	64	3	1.5	1
Orange	100	60	29	65	40	20	1.5	1.0	#
Red	45	25	15	25	14	13	1.0	0.4	0.3
Green	45	25	12	21	12	11	0.5	0.3	0.2
Blue	20	11	8	14	8	7	0.2	#	#
Brown	12	8.5	5	8	5	3	0.2	#	#

Observation angle	0,2°		0,5°	
Entrance angle	-4°	30°	-4°	30°
White	360	170	150	72
Yellow	270	135	110	54
Fl. Yellow-green	290	135	120	55
Orange	145	68	60	28
Fl. Orange	105	50	45	22
Red	65	30	27	13
Green	50	25	21	10
Blue	30	14	13	6
Brown	18	8,5	7,5	3,5

Table 3 – Chromaticity coordinates (DIN 6171-1: 2011-11)									
Colours	1		2		3		4		Luminance Factor $\beta$
	x	y	x	y	x	y	x	y	
White	0.305	0.315	0.335	0.345	0.325	0.355	0.295	0.325	> 0.27
Yellow	0.494	0.506	0.470	0.480	0.513	0.437	0.545	0.455	> 0.16
Orange	0.610	0.390	0.535	0.375	0.506	0.404	0.570	0.429	$\geq 0.14$
Red	0.735	0.265	0.700	0.250	0.607	0.343	0.655	0.345	$\geq 0.03$
Green	0.007	0.703	0.216	0.448	0.147	0.400	0.018	0.454	$\geq 0.03$
Blue	0.100	0.109	0.146	0.156	0.183	0.115	0.137	0.038	$\geq 0.01$
Brown	0.455	0.397	0.523	0.429	0.479	0.373	0.558	0.394	0.03 – 0.09

Table 4 – Chromaticity coordinates (ASTM D4956 (type IV))									
Colours	1		2		3		4		Luminance Factor (Y %)
	x	y	x	y	x	y	x	y	
White	0.303	0.300	0.368	0.366	0.340	0.393	0.274	0.329	> 27
Yellow	0.498	0.412	0.557	0.442	0.479	0.520	0.438	0.472	$15 \leq Y \leq 45$
Fl. yellow-green	0.387	0.610	0.369	0.546	0.428	0.496	0.460	0.540	> 60
Orange	0.558	0.352	0.636	0.364	0.570	0.429	0.506	0.404	$10 \leq Y \leq 30$
Fl. orange	0.583	0.416	0.535	0.400	0.595	0.351	0.645	0.355	> 20
Red	0.648	0.351	0.735	0.265	0.629	0.281	0.565	0.346	$2.5 \leq Y \leq 15$
Green	0.026	0.399	0.166	0.364	0.286	0.446	0.207	0.771	$3 \leq Y \leq 12$
Blue	0.140	0.035	0.244	0.210	0.190	0.255	0.065	0.216	$1 \leq Y \leq 10$
Brown	0.430	0.340	0.610	0.390	0.550	0.450	0.430	0.390	$1 \leq Y \leq 9$

### Physical and Chemical Properties

<b>Thickness*</b> (without protective liner)	Standard colours: 0.295 mm Fluorescent colours: 0.385 mm
<b>Temperature resistance</b>	adhered to aluminium, -56° C to +82° C (-70° F to 180° F)
<b>Resistance to cleaning agents</b>	adhered to aluminium, 8 h in solution (0.5% household cleaning agents) at room temperature and 65° C (150° F), no variation
<b>Adhesive power*<sup>1</sup></b> (FINAT-TM1 after 24h, stainless steel)	15 N/25 mm (1 inch) (film tear)
<b>Shelf life***</b>	1 year
<b>Application temperature</b>	> +10° C (50° F)
<b>Service life by specialist application**</b> under vertical outdoor exposure	5 years (not printed)

\* average \*\* standard central European climate \*\*\* in original packaging, at 20° C and 50% relative humidity <sup>1</sup>180° Peel @ 300 mm (12") /min

**Note:** Values stated in SI units are to be regarded as standard. The values in parentheses are conversions and shall not be considered as the standard, as these values may be approximate.

### IMPORTANT NOTICE

When using ORALITE® sheeting the relevant national specifications have to be complied with. ORAFOL recommends you obtain the current requirements from your local authority and ensure product conformance with such requirements. Please contact ORAFOL for further information.

All ORALITE® products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning ORALITE® products is based upon research which the Company believes to be reliable although such information does not constitute a warranty. Because of the variety of uses of ORALITE® products and the continuing development of new applications, the purchaser should carefully consider the suitability and performance of the product for each intended use, and the purchaser shall assume all risks regarding such use. All specifications are subject to change without prior notice.

No warranty is given for purposes other than those listed in the Technical Datasheet or which are not processed according to ORAFOL's processing and handling instructions. The durability of the signs will depend on a variety of factors, including but not limited to substrate selection and preparation, compliance with recommended application guidelines, geographic area, exposure conditions and maintenance of the product and finished sign. Sign failures caused by the substrate or improper surface preparations are not the responsibility of ORAFOL. Please refer to the full warranty document available at [www.orafol.com](http://www.orafol.com) for detailed information.

ORALITE® is a registered trademark of ORAFOL Europe GmbH.

