

## Description

ORALITE® GP 801 Check is a tough weather and solvent resistant tape designed to be sewn on to high visibility garments. The reflectivity exceeds the highest performance level of EN ISO 20471:2013.

## Product Construction


ORALITE® GP 801 Check is composed of cube corner (microprism) retroreflective elements integrally bonded to a flexible, smooth-surfaced tough and weather resistant UV stabilised polymeric film. The prism surfaces are metallised to provide a mirror surface to the prism facets. The product comes with a fabric backing to facilitate sewing. Printing is added in the production process to create a checker pattern in colour.

## Product Approvals

EN ISO 20471:2013 Separate Performance

Test certificates for garment CE mark acquisition are available upon request.

## Film Logo Pattern

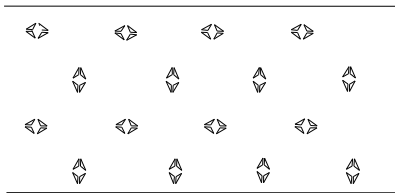

## Visual Appearance



## Colour

ORALITE® GP 801 Check is available with a silver base colour and check pattern in green, blue, red and black.

## Retroreflectivity

ORALITE® GP 801 Check tapes comply with the minimum reflectivity requirements of EN ISO 20471:2013 separate performance, when tested in accordance with the procedures in EN ISO 20471:2013. *Typical* coefficients of retroreflection for ORALITE® GP 801 Check when applied to fabric are shown in Table 1.

## Care Instructions



## Dry Cleaning

Do not dry clean.

## Machine Washing

ISO 6330:2012; Method 6N - 100 washings at 60° C

## Application Instructions

Please contact ORAFOL for full instructions.

## Shelf Life

The product must be used within one year from the shipment date. All rolls including partially used rolls should be stored in original packaging, tightly wound. Store in a clean and dry area, away from direct sunlight. Store at 20° C and 50% relative humidity.

**Table 1**  
**Retroreflectivity**

Observation Angle	Entrance Angle ( $\beta_1, \beta_2=0$ )			
	5°	20°	30°	40°
0,20°	550	400	250	150
0,33°	300	250	175	100
1,00°	30	20	20	15
1,50°	10	10	7	7

All values have units of cd/lux/m<sup>2</sup>.

## IMPORTANT NOTE

All ORAFOL products are subject to careful quality control throughout the entire manufacturing process, and it is ensured that they are of merchantable quality and free from manufacturing defects. The information published is based on our analyses and studies and does not constitute any warranted properties or any agreement as to quality. Due to the diverse possibilities of use of ORAFOL products and the constant development of new applications, the buyer should carefully consider the suitability and performance of the product for the respective purpose; it bears all risks associated with such use. No warranty is given for purposes other than those listed in the Technical Data Sheet or for applications that are not processed in accordance with ORAFOL's processing instructions.

The durability of the end product depends upon a variety of factors, including but not limited to substrate selection and preparation, compliance with the recommended application guidelines, geographical area, exposure conditions and maintenance of the ORAFOL material and of the end product. Product defects caused by the substrate or improper surface preparation do not lie within ORAFOL's sphere of responsibility.

When using ORAFOL products, the pertinent national regulations are to be observed. ORAFOL recommends that you obtain the current stipulations from your local authority and ensure that the product meets these requirements. Please contact ORAFOL for further information.

ORALITE® is a registered trademark of ORAFOL Europe GmbH.