

## Description

ORALITE® V98 Conformable Graphic Sheeting is a tough weather and solvent resistant microprismatic retroreflective product designed for rugged outdoor use for vehicles that require increased visibility such as fire, EMS, police, utility, telecom and DOT. The material is die cuttable and plotter cuttable, and easy to apply to smooth painted or unpainted vehicle surfaces. The single layer product does not require edge sealing, and is designed to be applicator friendly due to the potential to template fewer pieces than other prismatic graphic films. ORALITE® V98 meets/exceeds the requirements of NFPA 1901.

## Product Construction

ORALITE® V98 Conformable Graphic Sheeting is composed of cube corner (microprism) retroreflective elements integrally bonded to a flexible, smooth-surfaced, tough and weather-resistant UV stabilized polymeric film. The prism surfaces are coated with a vacuum deposition of aluminum to provide a mirror surface to the prism facets.

## Reflectivity

Typical values for the coefficient of retroreflection for ORALITE® V98 Conformable Graphic Sheeting are shown in Table 1 when illuminated with CIE standard illuminant A and measured with the provisions of CIE No.54.2. Rotation angles of 0° and 90° are measured and averaged.

## Color

ORALITE® V98 Conformable Graphic Sheeting is available in white, yellow, red, blue, green, fluorescent lime, fluorescent yellow and fluorescent orange. The color shall be located in the area defined by the chromaticity coordinates and luminance factor provided in Table 2, when measured in accordance with the provisions of CIE No. 15.2. The four pairs of coordinates determine the acceptable color when measured with standard illuminant D65 using a Hunter ColorFlex.

## Adhesive

The adhesive is protected by a release liner which shall be removed by peeling, without soaking in water or other solvents. The adhesive produces such a bond that a 1" (50 mm) strip shall support a 1 3/4 pound (0.79 kg) weight for 5 minutes without the strip peeling for a distance of more than 2" (50 mm) when applied to a smooth aluminum surface as specified in the ASTM D4956, section 7.5 adhesion test.

## Impact Resistance

Following application to a smooth surface aluminum rectangle, 0.020" by 3" by 6", the specimen is conditioned for 24 hours at 72°F and 50% relative humidity. The sheeting shall show no cracking when the face of the panel is subjected to an impact of a two pound weight with a 5/8" rounded tip dropped from a 100 in/lb setting on a Gardner variable impact tester, IG-1120.

## Flexibility

The sheeting is conditioned for 24 hours at 72°F and 50% relative humidity. The release liner is removed and the sheeting is sufficiently flexible to show no cracking when bent in one second's time around a 1/8" diameter mandrel with the adhesive contacting the mandrel.

## Solvent Resistance

ORALITE® V98 Conformable Graphic Sheeting meets the requirements of LS-300C solvent resistance, section 3.6.7, when tested as specified in Table VI, test method 4.4.6.

## Specular Gloss

The sheeting shall have a specular gloss of not less than 40 when tested in accordance with ASTM method D523 at an angle of 85°.

## Shrinkage

A 9" x 9" specimen of the sheeting with liner is conditioned a minimum of one hour at 72°F and 50% relative humidity. The liner is then removed and the specimen is placed on a flat surface with the adhesive side up. Ten minutes after the liner is removed and again after 24 hours, the specimen is measured to determine the amount of dimensional change. The specimen will not shrink in any dimension more than 1/32" in 10 minutes and 1/8" in 24 hours.

## Application Instructions

Material must be applied when the air and surface temperature is 65°F or above. Use a clean towel and Isopropyl alcohol, or similar, to wipe the surface before application. If any air bubbles are trapped, use a pin to puncture the bubble and a squeegee to push the air towards the pin hole. Please refer to the V98 Conformable Graphic Sheeting Application Instructions for specifics.

## Warranty

ORALITE® V98 has a 5 year warranty. Please contact ORAFOL Americas for details.



ORAFOL Americas – GA  
1100 Oracal Parkway  
Black Creek, GA 31308  
Phone: 888.672.2251

ORAFOL Americas – CT  
120 Darling Drive  
Avon, CT 06001  
Phone: 800.654.7570

ORAFOL Canada  
2831 Bristol Circle  
Oakville, Ontario L6H 6X5  
Phone: 888.727.3374

**Table 1**  
**Coefficient of Retroreflection\* (R<sub>A</sub>)**

Observation Angle	Entrance Angle	White	Yellow	Green	Red	Blue	Fl Lime	Fl Yellow	Fl Orange
0.2°	-4°	750	525	130	130	55	420	295	200
	30°	375	260	65	65	25	200	145	100
	45°	120	85	20	20	8	70	45	30
0.33°	-4°	375	260	65	65	25	200	145	100
	30°	185	130	32	32	13	100	75	50
	45°	60	40	10	10	4	35	25	20
0.5°	-4°	110	80	20	20	8	65	45	45
	30°	60	45	10	10	4	33	23	20
	45°	20	14	4	4	1.3	10	7	8
1.0°	-4°	28	20	5	5	2	15	11	8
	30°	14	10	2	2	1	8	5	4
	45°	4	3	---	---	---	2	2	2


\*Candelas/Lux/Square Meter

**Table 2**  
**Color Specification Limits**

Color	Chromaticity Coordinates*								Luminance Factor (Y%)	
	1		2		3		4		Min.	Max.
	x	y	x	y	x	y	x	y		
White	0.303	0.300	0.368	0.366	0.340	0.393	0.274	0.329	27	---
Yellow	0.498	0.412	0.557	0.442	0.479	0.520	0.438	0.472	15	45
Green	0.026	0.399	0.166	0.364	0.286	0.446	0.207	0.771	3.0	12
Red	0.648	0.351	0.735	0.265	0.629	0.281	0.565	0.346	2.5	15
Blue	0.140	0.035	0.244	0.210	0.190	0.255	0.065	0.216	1.0	10
Fl Lime	0.387	0.610	0.369	0.546	0.428	0.496	0.460	0.540	60	---
Fl Yellow	0.479	0.520	0.446	0.483	0.512	0.421	0.557	0.442	40	---
Fl Orange	0.583	0.416	0.535	0.400	0.595	0.351	0.645	0.355	20	---

\* The four pairs of chromaticity coordinates determine the acceptable color in terms of the CIE diagram.

**Film Logo Pattern**

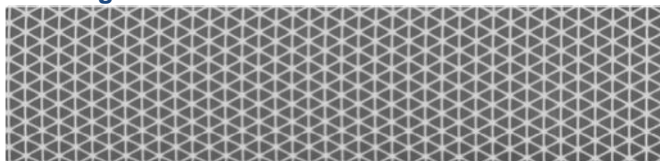

**IMPORTANT NOTICE**

All ORALITE® products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning ORALITE® products is based upon research which the Company believes to be reliable although such information does not constitute a warranty. Because of the variety of uses of ORALITE® products and the continuing development of new applications, the purchaser should carefully consider the suitability and performance of the product for each intended use, and the purchaser shall assume all risks regarding such use.

All specifications are subject to change without prior notice.

WARNING: This product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.



ORAFOL Americas – GA  
 1100 Oracal Parkway  
 Black Creek, GA 31308  
 Phone: 888.672.2251

ORAFOL Americas – CT  
 120 Darling Drive  
 Avon, CT 06001  
 Phone: 800.654.7570

ORAFOL Canada  
 2831 Bristol Circle  
 Oakville, Ontario L6H 6X5  
 Phone: 888.727.3374

**ORALITE® V98**  
**Conformable Graphic Sheeting**  
*(Formerly a Reflexite Branded Product)*

Technical Datasheet  
12/2015  
Page 3 of 3

ORALITE® is a registered trademark of ORAFOL Europe GmbH.



ORAFOL Americas – GA  
1100 Oracal Parkway  
Black Creek, GA 31308  
Phone: 888.672.2251

ORAFOL Americas – CT  
120 Darling Drive  
Avon, CT 06001  
Phone: 800.654.7570

ORAFOL Canada  
2831 Bristol Circle  
Oakville, Ontario L6H 6X5  
Phone: 888.727.3374

reflective-americas@orafol.com – [www.orafolamericas.com](http://www.orafolamericas.com)